查询A220供应商

AUK Semiconductor

# SRA2202SF

PNP Silicon Transistor

## Descriptions

- Switching application
- Interface circuit and driver circuit application

## Features

- With built-in bias resistors
- Simplify circuit design
- Reduce a quantity of parts and manufacturing process
- High packing density

## Ordering Information

| Type NO. | Marking | Package Code |
|---|---|---|
| SRA2202SF | RA2 | SOT-23F |

## Outline Dimensions

unit : mm




■ Equivalent Circuit




**PIN Connections**
1. Base
2. Emitter
3. Collector

| $R_1$ | $R_2$ |
|---|---|
| 10KΩ | 10KΩ |
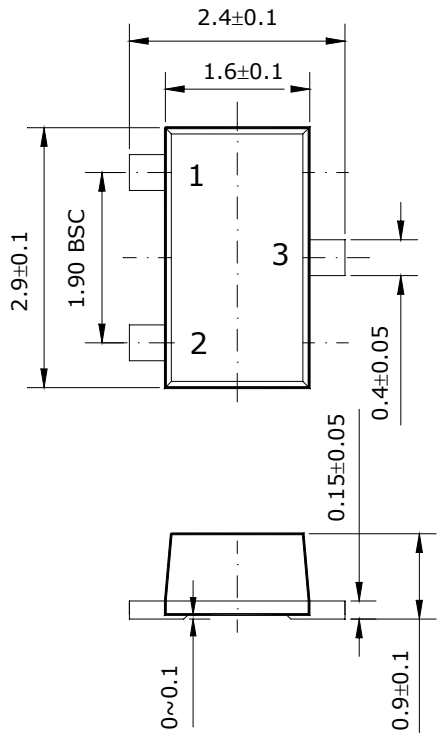
## Absolute maximum ratings (Ta=25°C)

| Characteristic | Symbol | Ratings | Unit |
|---|---|---|---|
| Out Voltage | $V_O$ | -50 | V |
| Input Voltage | $V_I$ | -30 | V |
| Out Current | $I_O$ | -100 | mA |
| Power Dissipation | $P_D$ | 200 | mW |
| Junction Temperature | $T_J$ | 150 | °C |
| Storage Temperature | $T_{STG}$ | -55 ~ 150 | °C |
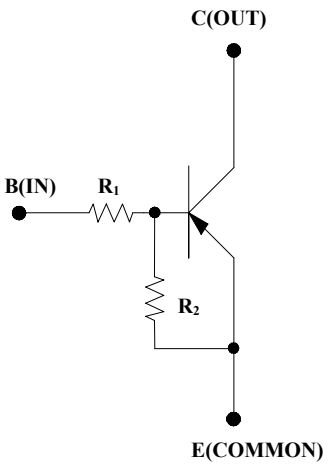
## Electrical Characteristics (Ta=25°C)

| Characteristic | Symbol | Test Condition | Min. | Typ. | Max. | Unit |
|---|---|---|---|---|---|---|
| Output Cut-off Current | $I_{O(OFF)}$ | $V_O$=-50V, $V_I$=0 | - | - | -500 | nA |
| DC Current Gain | $G_I$ | $V_O$=-5V, $I_O$=-10mA | 50 | 80 | - | - |
| Output Voltage | $V_{O(ON)}$ | $I_O$=-10mA, $I_I$=-0.5mA | - | -0.1 | -0.3 | V |
| Input Voltage (ON) | $V_{I(ON)}$ | $V_O$=-0.2V, $I_O$=-5mA | - | -1.8 | -2.4 | V |
| Input Voltage (OFF) | $V_{I(OFF)}$ | $V_O$=-5V, $I_O$=-0.1mA | -1.0 | -1.2 | - | V |
| Transition Frequency | $f_T$* | $V_O$=-10V, $I_O$=-5mA | - | 200 | - | MHz |
| Input Current | $I_I$ | $V_I$=-5V | - | - | -0.88 | mA |

* : Characteristic of Transistor Only

## Electrical Characteristic Curves

**Fig. 1 $I_O$ - $V_{I(ON)}$**

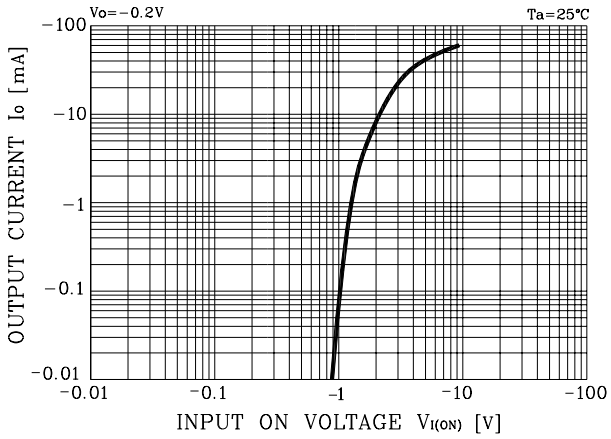


**Fig. 2 $I_O$ - $V_{I(OFF)}$**

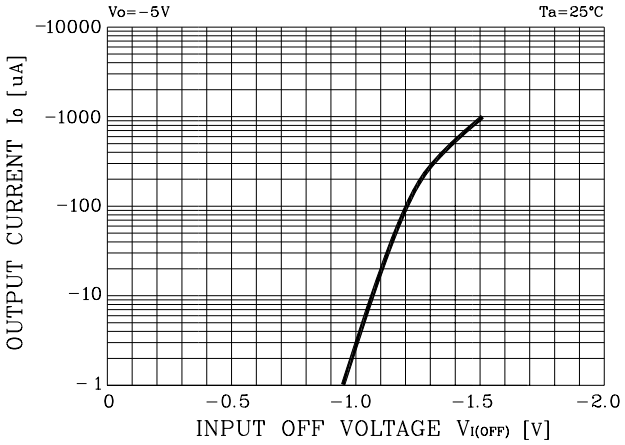


**Fig. 3 $G_I$ - $I_O$**